# PureGlyde Recessed Motorised + Manually Operated Curtain Track

## Architectural Technical Specification | Recessed Profile System

| DOCUMENT | REVISION | DATE |
|---|---|---|
| PG-TS-01 | D | OCT 2026 |

## System Description.

PureGlyde is a premium Recessed Curtain Track solution designed by Meyer Blinds for motorised or manual operation. Motorised systems combine Somfy Glydea Ultra or Movelite motors with a custom aluminium recess profile, purpose-built end components and removable wedge fixings to create a clean floor-to-ceiling Curtain finish. The profile is configured for a straight ceiling cut-out and future track access.

## Product Specification.

| | |
|---|---|
| **Manufacturer** | Meyer Blinds |
| **Product** | PureGlyde recessed motorised and manually operated curtain track |
| **Operation** | Manual or motorised |
| **Motor systems** | Somfy Glydea Ultra and Somfy Movelite |
| **Draw configuration** | One-way draw or two-way draw; motor shown on left in supplied details |
| **Recess profile** | Custom aluminium extrusion with purpose-built motor and belt-return end pieces |
| **Track fixing** | Removable wedge fixings, nominally one wedge at 500 mm intervals |
| **Curved track** | Machine bending available; fixed radius minimum 500 mm or continuation curve |
| **Warranty** | 5-year warranty, subject to Meyer Blinds warranty terms |



## Key Dimensional Criteria.

| 42 mm | L - 6 | 51.7 | 25.6 |
|---|---|---|---|
| **Ceiling cut-out** | **Cut-out length** | **Overall width** | **Channel depth** |
| Nominal width | Track less 6 mm | Section dimension | Section dimension |

## Specification + Coordination Notes.

- Allow 3 mm at each track end and for the 6 mm end-hook projection shown.
- Maintain clearance between motor body, curtain wrap, hooks and adjoining elements.
- Confirm motor side, draw direction, power, controls, substrate and ceiling build-up before manufacture.
- All dimensions are in millimetres. Do not scale; verify site dimensions before ordering.


# Components + Profile Geometry.

## PureGlyde Recessed Track Assembly + Removable Fixing Components.


### Track Assembly Details.



Full Assembly

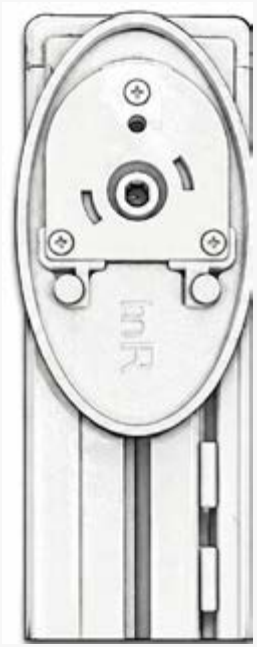


Drive End

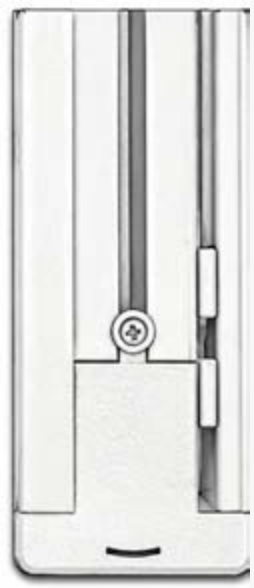

Return Section

### Profile Dimensions.

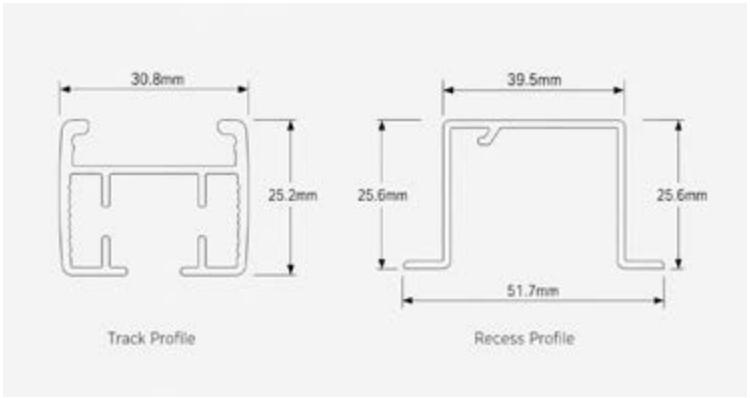



### Wedge Fixing.




**Track Profile**
30.8 mm wide x 25.2 mm high.

**Recess Profile**
39.5 mm internal width x 25.6 mm high; 51.7 mm overall width.

**Retention**
Removable wedge fixings at nominal 500 mm intervals.

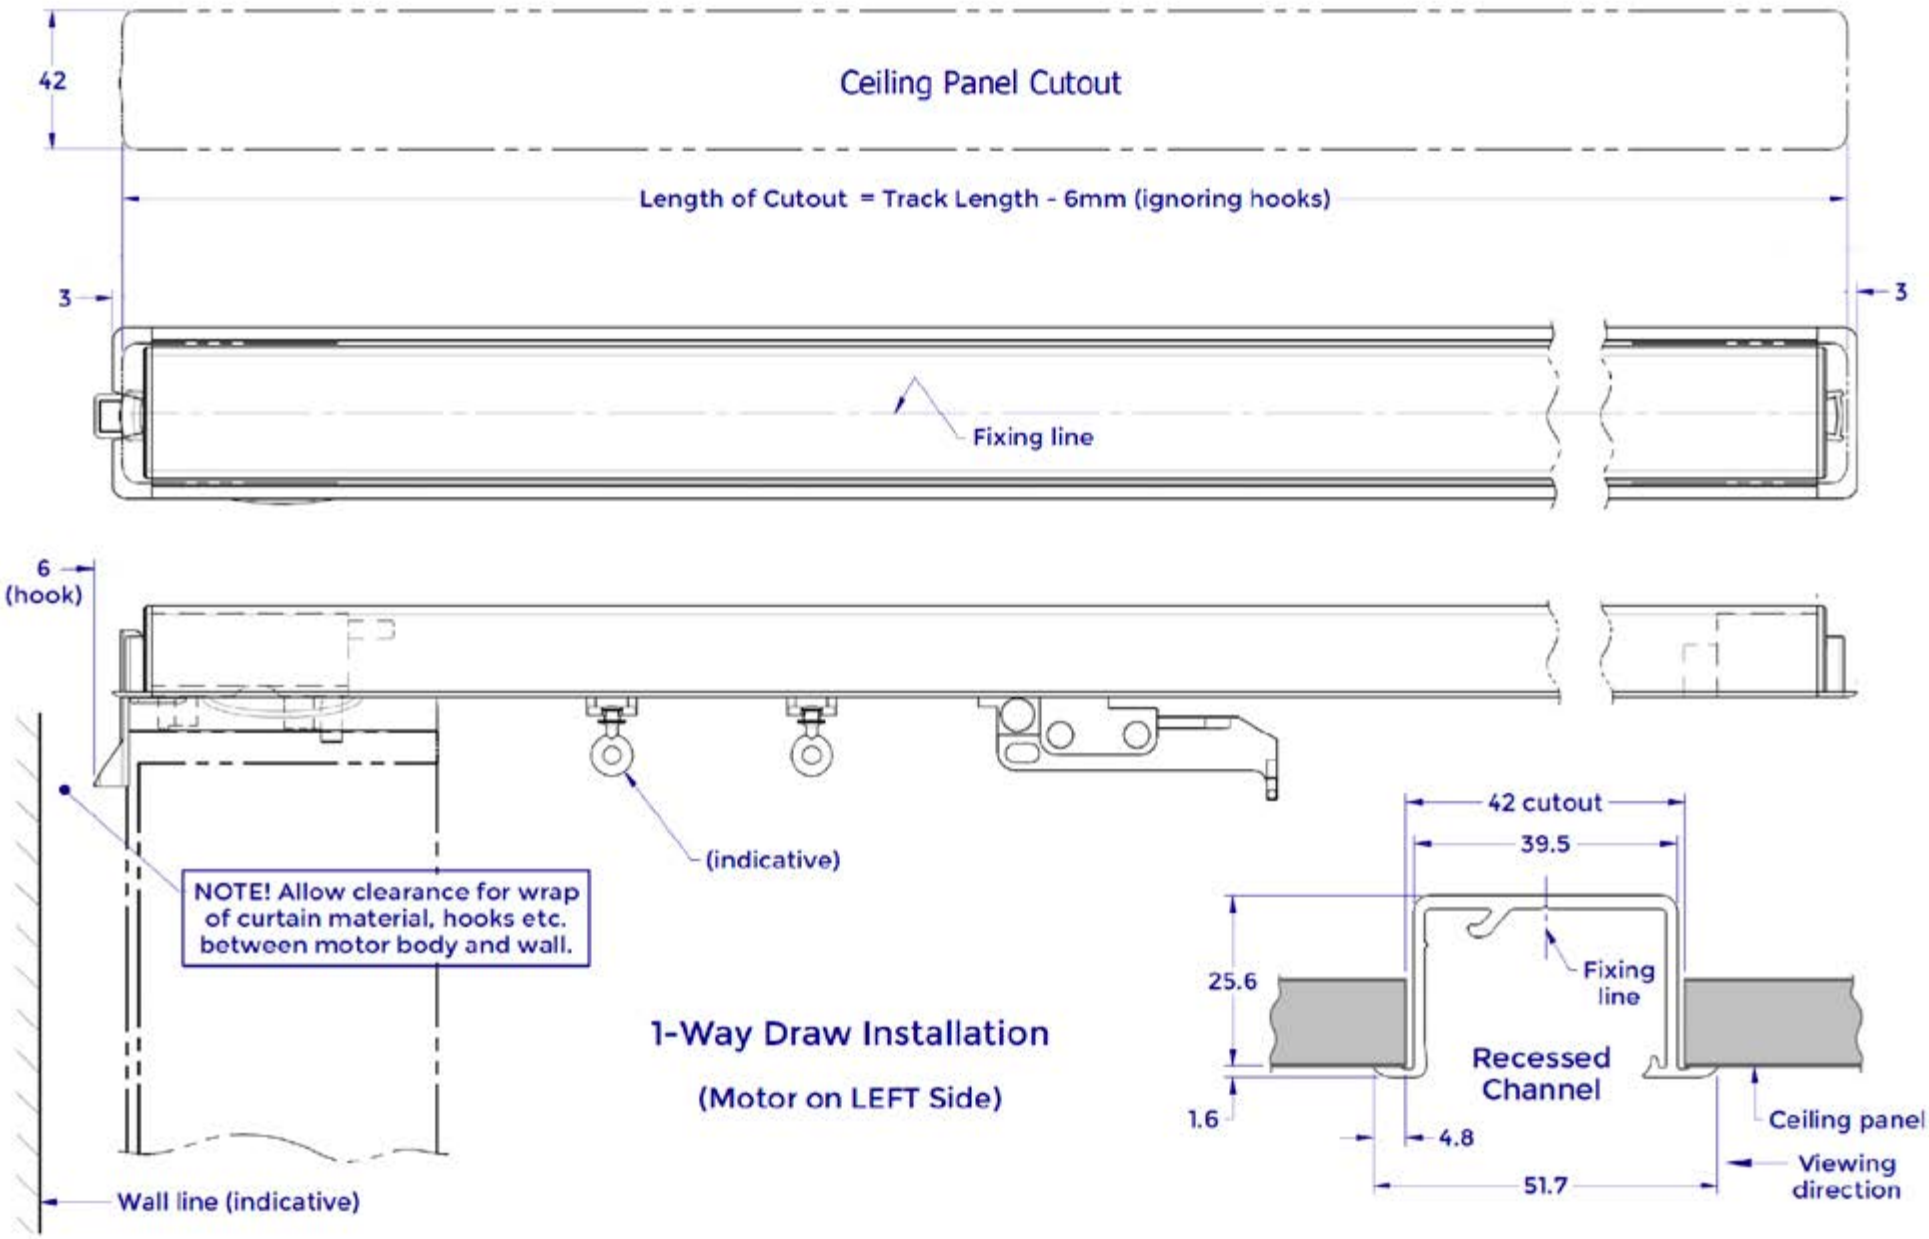
42
Ceiling Panel Cutout
Length of Cutout = Track Length - 6mm (ignoring hooks)
3
3
Fixing line
6
(hook)
(indicative)
NOTE! Allow clearance for wrap of curtain material, hooks etc. between motor body and wall.
Wall line (indicative)
1-Way Draw Installation
(Motor on LEFT Side)
42 cutout
39.5
25.6
Fixing line
Recessed Channel
1.6
4.8
51.7
Ceiling panel
Viewing direction

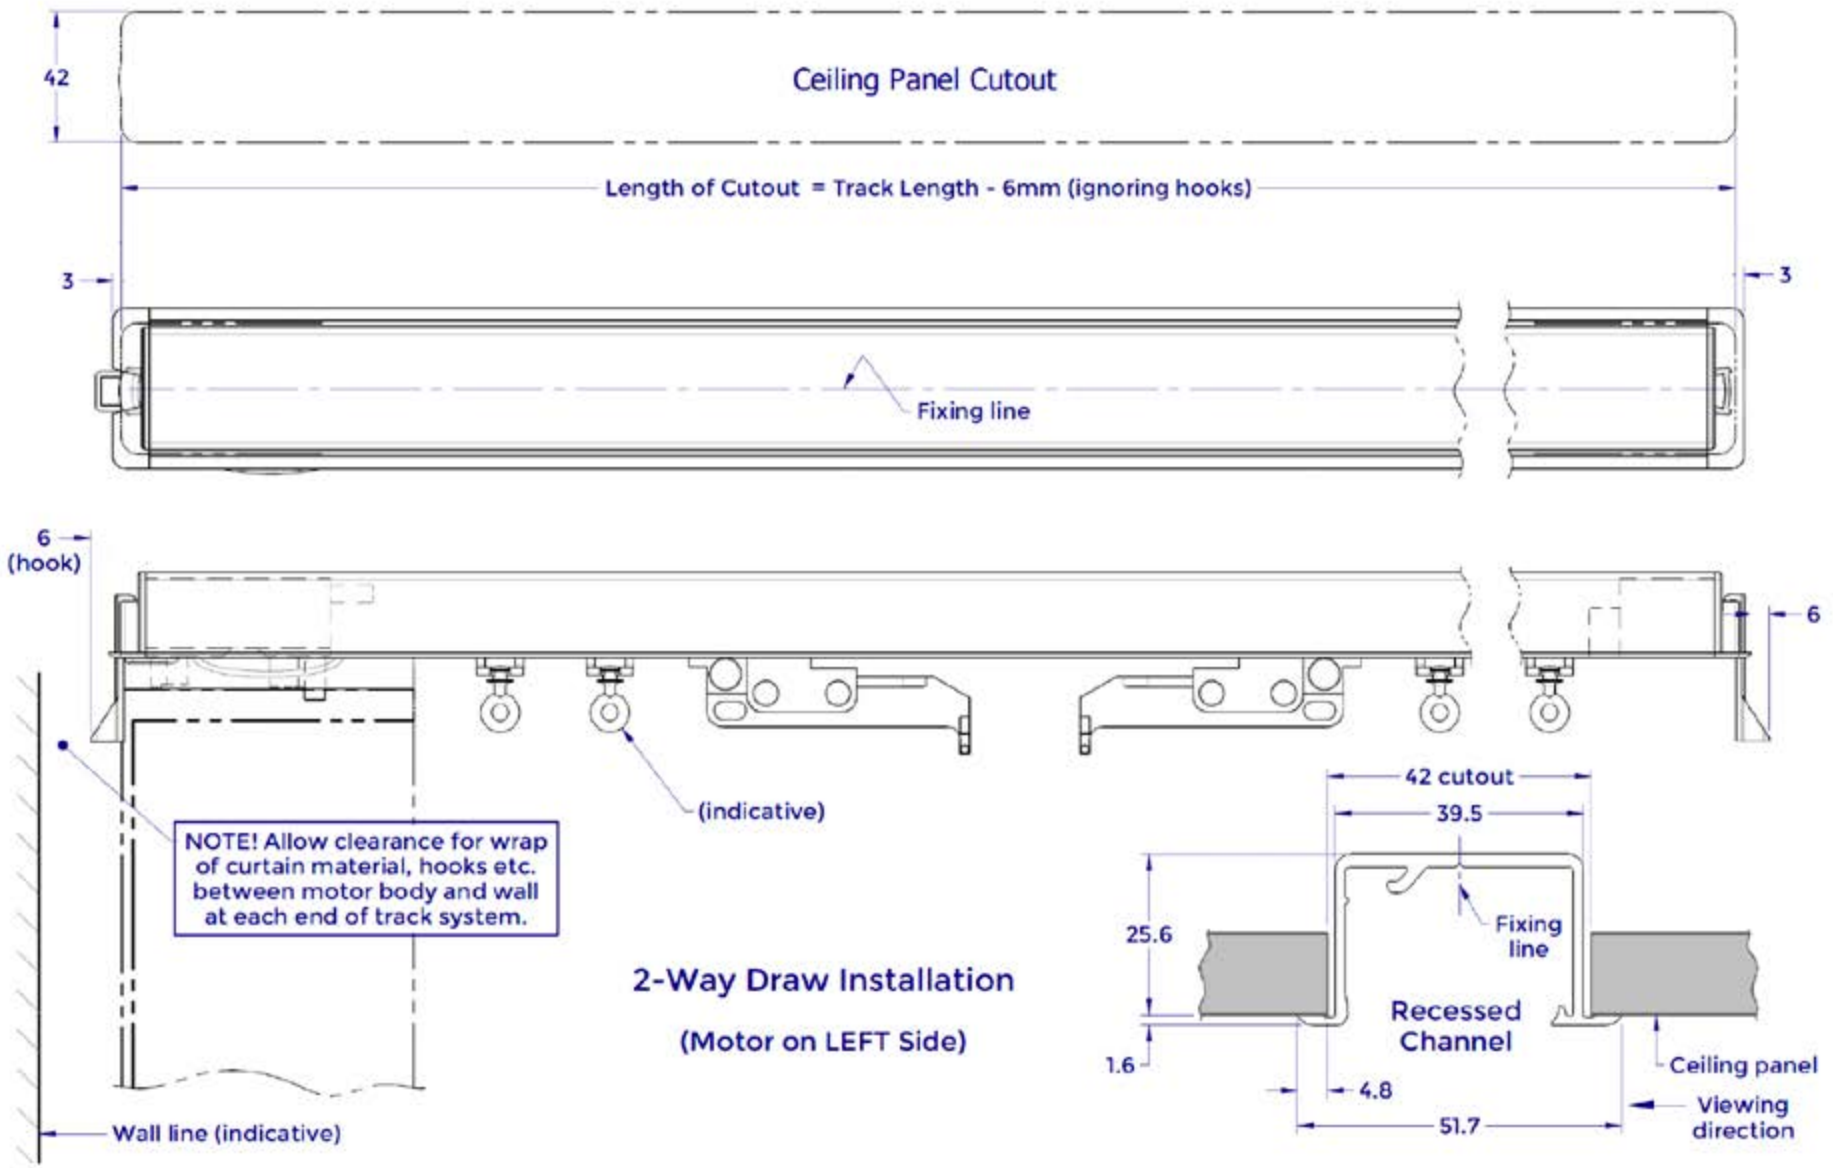
42
Ceiling Panel Cutout
Length of Cutout = Track Length - 6mm (ignoring hooks)
3
3
Fixing line
6
(hook)
6
(indicative)
NOTE! Allow clearance for wrap of curtain material, hooks etc. between motor body and wall at each end of track system.
Wall line (indicative)
2-Way Draw Installation
(Motor on LEFT Side)
42 cutout
39.5
25.6
Fixing line
Recessed Channel
1.6
4.8
51.7
Ceiling panel
Viewing direction